

# ECO10000TALLFIREBSRT

Product description: water storage solution for fire suppression with 4" BSRT fittings




4" BSP x 4" BSRT Female Adaptor



4" BSRT Blank Cap



4" Brass Gate Valve

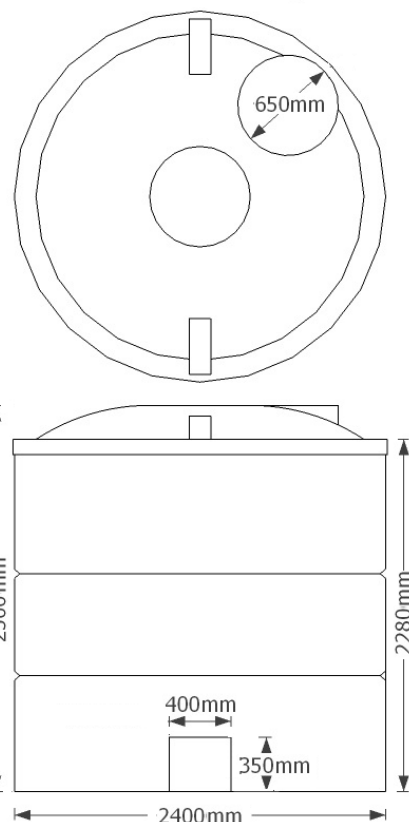

Tank Information				
Height	Diameter	Lid	Weight	Fittings
2500mm	2400mm	24" clampdown	200kg	Supplied loose

## PRODUCT NOTES:

Sizes approximate, owing to shrinkage  
Specification subject to change; please call to confirm details

- Tank must be sited on a level, fully supportive base leaving a gap of at least 100mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity
- **Tank moulded blank. Fittings supplied loose and outlet hole not drilled unless requested.**

## PRODUCT DETAILS:

- Tank made from virgin tank grade polymer
- 24" clampdown lid for easy access
- 4" nyglass tank outlet
- 4" brass gate valve
- 4" BSRT adaptor (female)
- 4" BSRT plug & chain

## BENEFITS:

- Economical, lightweight and easy to install
- Essential when local water supply is insufficient for fire protection
- Robust, heavy duty product; industrial strength
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects

## OPTIONAL EXTRAS:

- Lockable lid
- Tank connection kits (to link multiple tanks & increase capacity)
- Float valve for tank infill.
- AB airgap provision with side spill over weir and cowl (CAT5)
- Drain valve at a low level
- Level gauge



Etills Ltd,  
Unit 1 Whiting Way,  
Melbourn,  
Royston,  
SG8 6NA

Call 01763 261781