

ECO10000FIREINST

Product description: water storage solution for fire suppression with 2.5" instantaneous fittings





2.5" Instantaneous Twist Female to BS336 x 2" BSP Male Thread



2.5" Instantaneous Male Blank Plug and Chain



2" Brass Gate Valve

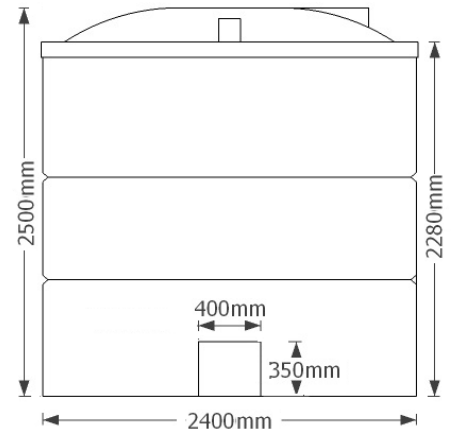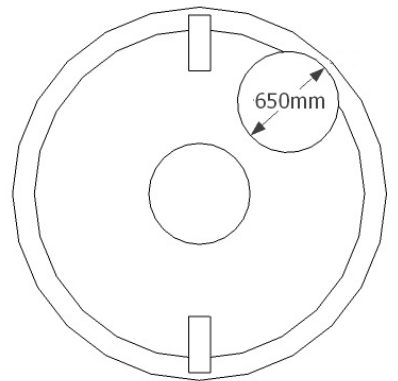

Tank Information				
Height	Diameter	Lid	Weight	Fittings
2500mm	2400mm	24" clampdown	200kg	Supplied loose

PRODUCT NOTES:

- Tank must be sited on a level, fully supportive base leaving a gap of at least 100mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity
- **Tank moulded blank. Fittings supplied loose and outlet hole not drilled unless requested.**

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT DETAILS:

- Tank made from virgin tank grade polymer
- 24" clampdown lid for easy access
- 2" brass threaded male outlet
- 2" brass gate valve
- 2.5" instantaneous twist female x 2" BSP male thread
- 2.5" instantaneous male blank plug

BENEFITS:

- Economical, lightweight and easy to install
- Essential when the local water supply is insufficient for fire protection
- Robust, heavy duty product; industrial strength
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects

OPTIONAL EXTRAS:

- Lockable lid
- Tank connection kits (to link multiple tanks & increase capacity)
- Float valve for tank infill.
- AB airgap provision with side spill over weir and cowl (CAT5)
- Drain valve at a low level
- Level gauge



Etills Ltd,
Unit 1 Whiting
Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781