


ECO10000TALL

Product description: cylindrical storage tank, suitable for internal or external use

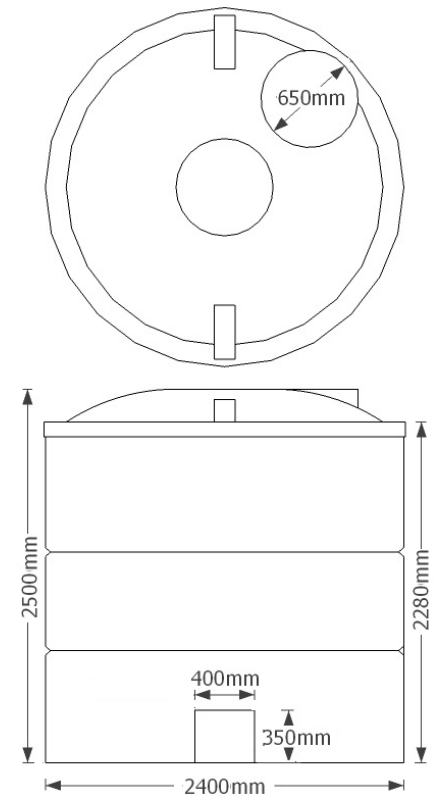

Product Information

Height	Diameter	Lid	Weight	Outlet
2500mm	2400mm	24" clampdown	200kg	Supplied loose

PRODUCT NOTES:

- Tank must be sited on a level, fully supportive base leaving a gap of at least 100mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity
- Tank moulded blank. Outlet hole not drilled unless requested

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT DETAILS:

- Made only from tank grade polymer
- Approximate wall thickness: 6-7mm
- 24" clampdown lid for easy access
- 2" brass male outlet supplied loose as standard
- 2" plastic shut off valve supplied loose as standard
- Accepts 6" flanged outlets

BENEFITS:

- Suitable for internal and external use
- Frost proof; will not crack in cold
- Value for money, high capacity storage
- Ideal for agricultural or commercial water storage
- Robust, heavy duty product; industrial strength
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects

OPTIONAL EXTRAS:

- Lockable lid
- Plastic tank connector (up to 4")
- Brass tank connector (up to 3")
- Essex flange (up to 2 1/4")
- Brass isolation valve
- Ball valve and float
- Tank connection kit (tanks can be connected together to increase capacity)



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781