
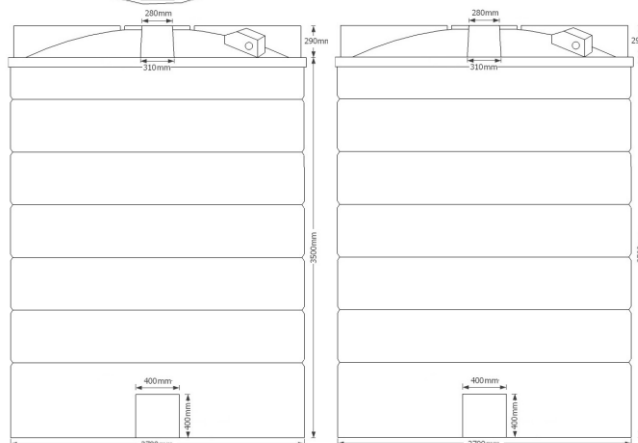


ECO20000MOL

Product description: cylindrical storage tank, suitable for fluids up to 1.3 SG



Product Information				
Height	Diameter	Lid	Weight	Outlet
3800mm	2700mm	24" screwdown	460kg	Supplied loose

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT NOTES:

- Tank must be sited on a level, fully supportive base leaving a gap of at least 100mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity
- Outlet not drilled unless requested

PRODUCT DETAILS:

- Made only from virgin, tank grade polymer
- Approximate wall thickness: 8mm
- 24" screw down lid for easy access
- 2" brass threaded male outlet supplied as standard
- Accepts up to 6" outlets
- Suitable for fluids up to 1.3 SG

OPTIONAL EXTRAS:

- Lockable lid
- Flanged outlets (up to 6")
- Plastic tank connector (up to 4")
- Brass tank connector (up to 3")
- Isolation valve

BENEFITS:

- Suitable for internal and external use
- Frost proof; will not crack in cold
- Value for money, high capacity storage
- Ideal for agricultural or commercial water storage
- Robust, heavy duty product; industrial strength
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781