


ECO25000TA

Product description: cylindrical storage tank with fully removable lid, suitable for internal or external use

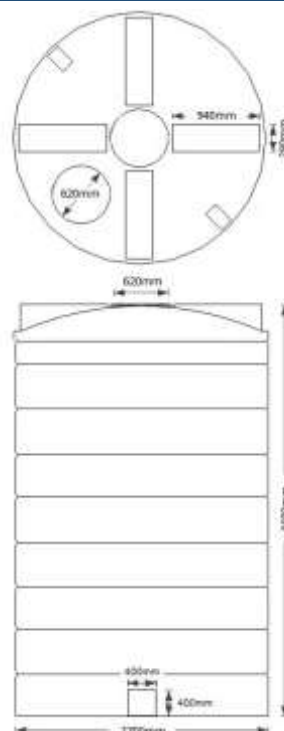

| Product Information | | | | |
|---------------------|----------|--------------------------------|--------|----------------|
| Height | Diameter | Lid | Weight | Outlet |
| 4480mm | 2700mm | 24" screwdown on removable lid | 500kg | Supplied loose |

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT NOTES:

- Tank must be sited on a level, fully supportive base leaving a gap of at least 50mm from walls or other tanks
- No additional pressure can be placed on tank sides or rim
- Additional fittings can be added as and where required without compromising tank's structural integrity
- Tank moulded blank with outlet supplied loose

BENEFITS:

- Fully removable lid allows full access for cleaning, maintenance and fitting of ancillaries.
- Suitable for internal and external use
- Frost proof; will not crack in cold
- Value for money, high capacity storage
- Ideal for domestic or commercial water storage
- Robust, heavy duty product; industrial strength
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects

PRODUCT DETAILS:

- Made from virgin polymer
- Approximate wall thickness: 8mm
- 24" screw-down lid/inspection hatch on fully removable lid as standard
- 2" brass threaded male outlet supplied as standard
- 2" plastic shut off valve supplied as standard
- Accepts up 8" flanged outlets

OPTIONAL EXTRAS:

- 16" lockable lid
- Tank connector (up to 4" BSP)
- Flanged outlets
- Brass isolation valve
- Ball valve & float
- Tie down brackets



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781