


ECO500WBV2POT

Product description: layflat 500 litre potable water storage tank, suitable for internal or external use

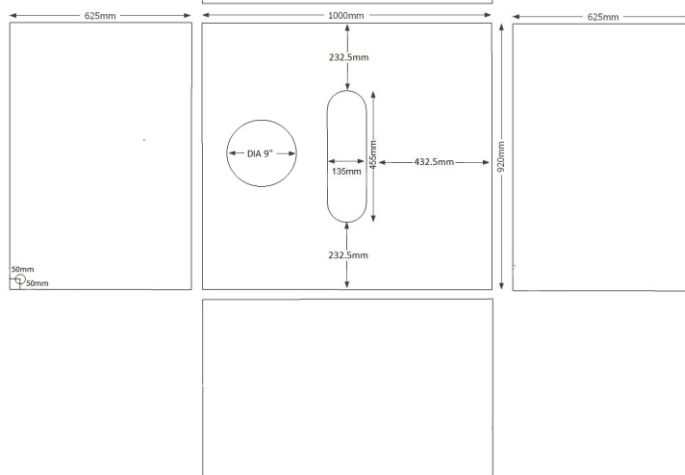

| Product Information | | | | | | |
|---------------------|--------|-------|--------|---------|-------------|----------------|
| Height | Length | Width | Weight | Outlet | Lid | Certificate no |
| 625mm | 1000mm | 920mm | 33kg | 1 " BSP | 9" unvented | 2003366 |

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT NOTES:

- Tanks must be installed in accordance with The Water Supply (Water Fittings) Regulations 1999 in order to be properly used for storage of drinking water. This will include the addition of fittings which are not supplied with the tank unless ordered separately.
- Tank must be sited on a level, fully supportive base leaving a gap of at least 50mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity.

PRODUCT DETAILS:

- WRAS approval number 2003366
- Approximate wall thickness: 6-7mm
- 9" unvented lid as standard
- 1" brass threaded outlet moulded into the tank
- Central baffles

OPTIONAL EXTRAS:

- Additional lid for easy access
- Brass tap
- Brass isolation valve
- By-law 30 kit
- Ball cock and float valve
- Tank connectors
- Stainless steel insert

BENEFITS:

- Suitable for internal and external use
- Frost-proof; plastic will not crack in cold
- Large footprint provides excellent stability
- Compact, sturdy design
- Robust, heavy duty product; industrial strength
- Holds shape when full of water
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength & durability
- 2 year warranty against manufacturing defects



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781