


ECO825PILPOT

Product description: 825 litre pillar tank with multiple outlets manufactured from WRAS approved polymer

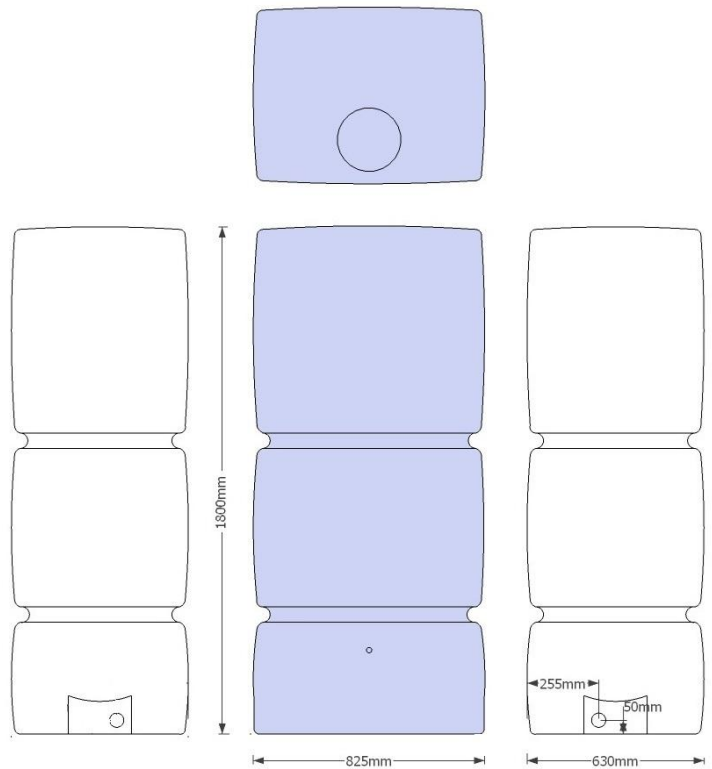

Product Information					
Height	Width	Depth	Weight	Outlets	Lid
1800mm	825mm	630mm	40kg	1 x ¾" & 2 x 1" BSP	9" screwdown

PRODUCT NOTES:

Sizes approximate, owing to shrinkage

- Tanks must be sited on a level, fully supportive base, leaving a 50mm expansion gap between any wall and the **CENTRE** of the back or side of the tank
- Multiple outlets. Raised tap connection allows containers to be filled. Lower outlets allow tank to be completely drained, or tanks to be linked
- Installation guidelines supplied
- Outlets not drilled unless requested

PRODUCT DETAILS:

- Made from WRAS approved polymer
- Approximate wall thickness: 6-7mm
- Non vented 9" screwdown lid as standard
- ¾" raised brass threaded outlet
- 2 x 1" side outlets, ideal for linking tanks or connecting an irrigation hose or external pump

OPTIONAL EXTRAS:

- Brass tap
- Brass isolation valve
- Byelaw kit
- Ball cock and float valve
- Tank connectors
- Upgrade to 14" or 16" lid
- Connection kit (for linking tanks)

BENEFITS:

- Suitable for internal and external use
- Frost-proof; plastic will not crack in cold
- Plastic meets the requirements of BS 6920-1:2000
- Plastic will not contaminate water
- Modern, minimalist pillar design
- Small footprint maximises capacity when space is limited
- Robust, heavy duty product; industrial strength
- Rotationally moulded for strength & durability
- 2 year warranty against manufacturing defects



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA