


# ECO10000T

Product description: cylindrical open top tank, suitable for internal or external use

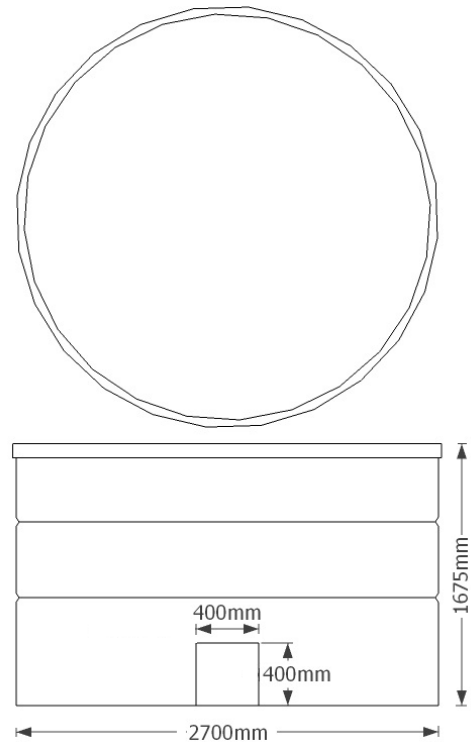

Product Information			
Height	Diameter	Weight	Outlet
1675mm	2700mm	180kg	2" plastic supplied loose

Sizes approximate, owing to shrinkage  
Specification subject to change; please call to confirm details

**PRODUCT NOTES:**

- Tank must be sited on a level, fully supportive base leaving a gap of at least 50mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity

**PRODUCT DETAILS:**

- Manufactured in black polymer as standard
- Approximate wall thickness: 5-6mm
- 2" plastic outlet supplied loose

**OPTIONAL EXTRAS:**

- Plastic isolation valve
- Brass isolation valve
- Tank connectors (up to 4" BSP)
- Ball cock and float valve
- Coloured polymer to suit location

**BENEFITS:**

- Suitable for internal and external use
- Frost proof; will not crack in cold
- Value for money, high capacity holding tank
- Ideal for domestic or commercial use
- Robust, heavy duty product; industrial strength
- Smooth sides for easy cleaning
- Rotationally moulded for strength and durability
- 1 year warranty against manufacturing defects



Scan to view our full range of water tanks



Etills Ltd,  
Unit 1 Whiting Way,  
Melbourn,  
Royston,  
SG8 6NA



Call 01763 261781