
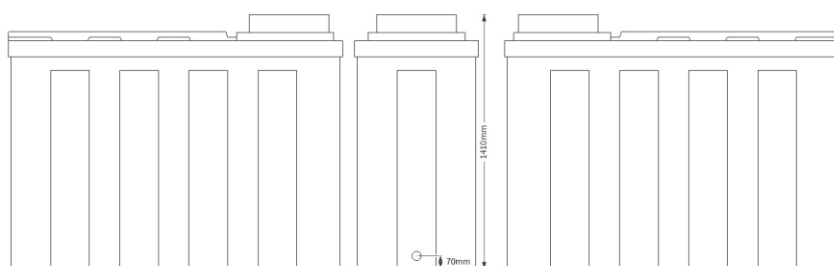


# ECO1070INS

Product description: insulated slimline water tank



## Product Information

Length	Width	Height	Overall weight	Tank connection	Lid
1880mm	690mm	1410mm	135kg	2" as standard	16" hinged outer 14" screwdown inner

### PRODUCT NOTES:

- Always keep tank upright. Never roll or put on its side.
- Tank must be sited on a level, fully supporting base
- Ensure that all fittings are insulated

Sizes approximate, owing to shrinkage  
Specification subject to change; please call to confirm details

### PRODUCT DETAILS:

- The perfect self-contained solution for the storage of non-potable water in harsh conditions
- Double wall construction
- SF19 SuperFOIL insulation
- 14" vented inner lid
- 2" brass threaded outlet as standard

### OPTIONAL EXTRAS:

- Brass tap
- Brass isolation valve with hose connector
- Tank connectors
- 1" outlet or no outlet
- 1" stainless steel insert
- Hasp and staple for lid
- Colour options available

### BENEFITS:

- Water is protected from external conditions
- Outer tank encapsulates and protects the insulation
- Covered bund prevents collection of rainwater & debris
- Opaque plastic reduces algae growth in sunlight
- Slimline design - ideal when space is limited
- Cost effective alternative to insulated GRP/FRP water tanks
- Rugged construction
- Rotationally moulded for strength & durability
- 2 year warranty against manufacturing defects



Etills Ltd,  
Unit 1  
Whiting Way, Melbourn  
Royston, SG8 6NA

Call 01763 261781

# ECO1070INS

Product description: insulated slimline water tank

## TECHNICAL DATA


### Tanks

- Rotationally moulded from one or more of the following polymers:
  - ICorene 1314/ 3560 (if coloured)
  - REVOLVE M-748 (black)/N307 (natural)
- 2" BSP brass threaded insert (1" brass or stainless steel available)
- 16" hinged lid on outer housing; 14" inner screwdown lid

Data sheets available

### Inner tank dimensions:

Capacity	Height	Length	Depth
1070 Litres	1170mm	1750mm	580mm

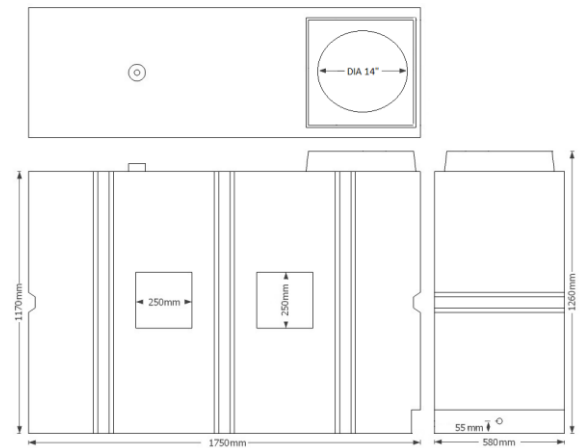

### Insulation

- SF19 SuperFOIL
- Standard thickness 40mm
- BBA Agrément and LABC Registered System Approval
- BBA certified R value of 2.58.
- Dupont ultra efficient nano coating technology.
- SF19 SuperFOIL also acts as a radiant barrier to reflect excessive heat gain during the summer months as well as insulating throughout the year
- Water Vapour Resistance 1200MNs/g
- Resistance to water penetration W1
- Flexibility at low temp. -40c
- Tensile Properties - Length (After Ageing) 635 N/50mm
- Tensile Properties - Width (After Ageing) 580 N/50mm

Call 01763 261781