

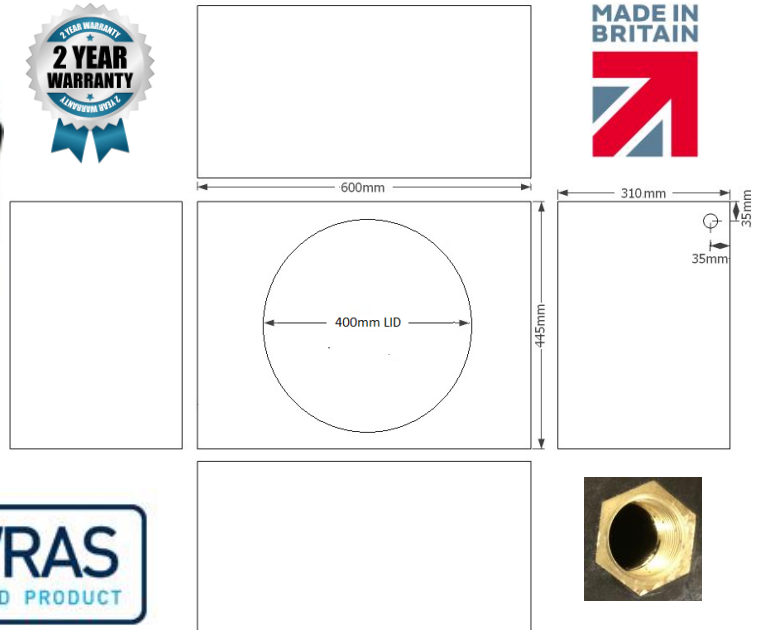


# ECO75V2POT

Product description: WRAS approved layflat 75 litre rectangular storage tank, suitable for internal or external use

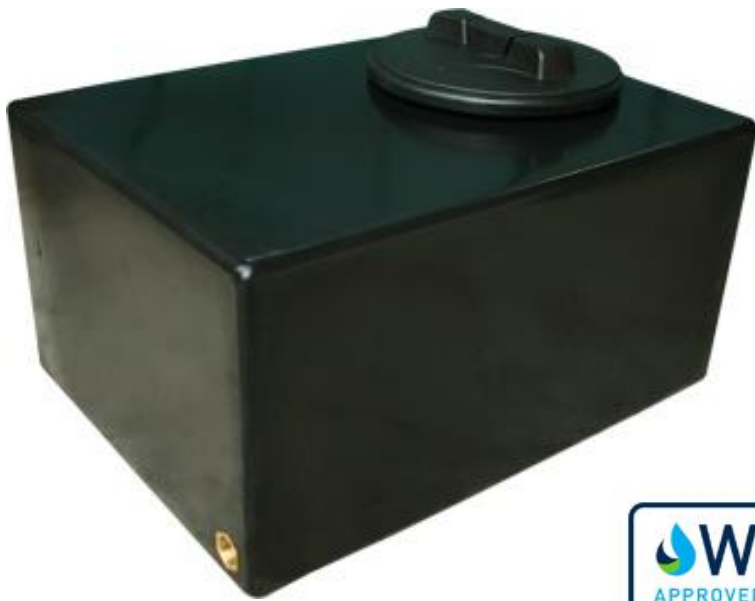

## Product Information

Height	Length	Width	Weight	Outlet	Lid	Certificate No
310mm	600mm	445mm	7kg	¾" BSP	400mm	2003366

Sizes approximate, owing to shrinkage  
Specification subject to change; please call to confirm details

### PRODUCT NOTES:

- Tanks must be installed in accordance with The Water Supply (Water Fittings) Regulations 1999 in order to be properly used for storage of drinking water. This will include the addition of fittings which are not supplied with the tank unless ordered separately.
- Tank must be sited on a level, fully supportive base leaving a gap of at least 50mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity.

### PRODUCT DETAILS:

- WRAS approval number 2003366
- Approximate wall thickness: 5mm
- 9" vented lid as standard
- ¾" brass threaded outlet moulded into the tank

### OPTIONAL EXTRAS:

- Brass tap
- Brass isolation valve
- By-law 30 kit
- Ball cock and float valve
- Tank connectors
- Stainless steel insert

### BENEFITS:

- Suitable for internal and external use
- Frost proof; will not crack in the cold
- Plastic meets the requirements of BS 6920-1:2000
- Plastic will not contaminate water
- Opaque plastic reduces algae growth in sunlight
- Compact design - ideal when space is limited
- Robust, heavy duty
- Rotationally moulded for strength and durability
- 2 year warranty against manufacturing defects



Etills Ltd,  
Unit 1 Whiting Way,  
Melbourn,  
Royston,  
SG8 6NA

Call 01763 261781